

ENGINEERED LIFTING SOLUTIONS

HOISTING FOR EXTREME APPLICATIONS



**STANDARD HEADROOM TROLLEY
HOIST COMBINATION**

500 KG – 50,000 KG LIFTING CAPACITY

Leaflet No. KITO-81260-81265.01.24

STANDARD HEADROOM TROLLEY HOIST COMBINATION

500 KG – 50,000 KG LIFTING CAPACITY

Designed and manufactured according to: EC machinery directive


- ▶ 2006/42/EC
- ▶ EN13157
- ▶ Manufactured in the Netherlands

Standard features

- ▶ Low pulling force on the hand chain
- ▶ Surface treatment 2 layer paint system and powder coating, colour Munsell 6YR6/14
- ▶ Nickel plated load chain, grade V (G 100) in acc. with standard EN818-7
- ▶ Load and hand chain electric galvanized
- ▶ Trolley wheels with life time lubricated bearings
- ▶ Wheel break support and anti-tilt device integrated

Optional:

- ▶ ☠ Also available in explosion protected execution
- ▶ Temperature class T4 / T135°C will be observed separately for each project
- ▶ Special surface protection acc. to ISO 12944
- ▶ 3.1 load test certificate
- ▶ Canvas chain bag, steel or stainless steel container
- ▶ Parking device for parking in unloaded condition
- ▶ Stainless steel 316 load chain and hand chain
- ▶ Stainless steel nameplate with tag number
- ▶ 3.1 material certificate for load bearing parts of the trolley
- ▶ Rubber buffers mounted on trolley

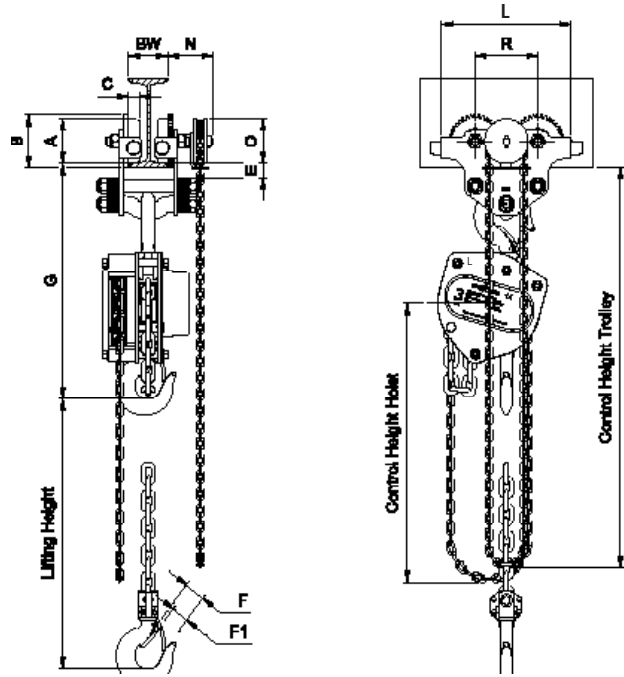

Capacity kg	Article number Push	Article number Geared	Chassis	Adjustable beam width min. - max. mm	Min. radius	No. of falls	Weight 3 meters lift kg	Headroom G	Dimensions													
									A	B	C	E	F	F1	R	L	N	O				
500	81260-00600	81265-00100	6 kN	55~102	700	1	13	337	Ø45	Ø60	15	15	31,1	27	75	150	-	-				
	81260-00601	81265-00101		105~152					Ø60	Ø75	18	20	34,6	29	99	190	90	Ø100				
	81260-01100	81265-01100		55~102					Ø80	Ø100	22	27	38,8	34	123	255	90	Ø100				
1,000	81260-01101	81265-01101	11 kN	105~152	1,050	1	17,5	355	Ø60	Ø75	18	20	34,6	29	99	190	90	Ø100				
	81260-01102	81265-01102		156~203					Ø80	Ø100	22	27	38,8	34	123	255	90	Ø100				
	81260-01103	81265-01103		206~254					Ø100	Ø120	25	35	42,5	40	144	300	95	Ø100				
1,500	81260-01600	81265-01600	22 kN	74~127	1,400	1	26,5	425	Ø80	Ø100	22	27	38,8	34	123	255	90	Ø100				
	81260-01601	81265-01601		127~180					Ø100	Ø120	25	35	42,5	40	144	300	95	Ø100				
	81260-01602	81265-01602		190~243					Ø125	Ø150	30	40	50	46,5	174	375	130	Ø135				
2,000	81260-01603	81265-01603	22 kN	254~305	1,750	1	32	450	Ø100	Ø120	25	35	46	42,5	144	300	95	Ø100				
	81260-22000	81265-02200		74~127					Ø125	Ø150	30	40	50	46,5	174	375	130	Ø135				
	81260-22010	81265-02201		127~180					Ø160	Ø190	35	45	79,5	72,5	220	450	130	Ø270				
2,500	81260-22020	81265-02202	33 kN	190~243	1,750	1	46	510	Ø100	Ø120	25	35	46	42,5	144	300	95	Ø100				
	81260-22030	81265-02203		254~305					Ø125	Ø150	30	40	50	46,5	174	375	130	Ø135				
	81260-02500	81265-02500		90~143					Ø160	Ø190	35	45	79,5	72,5	220	450	130	Ø270				
3,000	81260-02501	81265-02501	33 kN	149~203	2,200	2	43	600	Ø100	Ø120	25	35	46	42,5	144	300	95	Ø100				
	81260-02502	81265-02502		203~254					Ø125	Ø150	30	40	50	46,5	174	375	130	Ø135				
	81260-02503	81265-02503		251~305					Ø160	Ø190	35	45	79,5	72,5	220	450	130	Ø270				
5,000	81260-03300	81265-03300	52 kN	90~143	2,200	2	73	717	Ø125	Ø150	30	40	50	46,5	174	375	130	Ø135				
	81260-03301	81265-03301		149~203					Ø160	Ø190	35	45	79,5	72,5	220	450	130	Ø270				
	81260-03302	81265-03302		203~254					Ø200	Ø240	50	42	94,6	80	272	560	170	Ø300				
7,500	81260-03303	81265-03303	104 kN	251~305	2,950	3	150	915	Ø200	Ø240	50	42	95,7	81	272	560	170	Ø300				
	81260-05200	81265-05200		106~156					Ø200	Ø240	50	42	95,7	81	272	560	170	Ø300				
	81260-05201	81265-05201		160~210					Ø200	Ø240	50	42	95,7	81	272	560	170	Ø300				
10,000	81260-10401	81265-10401	104 kN	>=131	2,950	4	174	905	Ø160	Ø190	35	45	79,5	72,5	220	450	130	Ø270				
15,000	81260-16401	81265-16401	164 kN	>=155					2,950	6	294	1,165	Ø200	Ø240	50	42	94,6	80	272	560	170	Ø300
20,000	81260-20401	81265-20401	204 kN	>=170									2,950	8	377	1,345	Ø200	Ø240	50	42	95,7	81

Larger capacities up to 50,000kg on request

Changes in design and measurements reserved.

Van Leusden BV

Parelhoenweg 2 | 4791 PA Klundert | The Netherlands
Tel. +31 168 385 225 | www.vanleusden.com | info@vanleusden.com

LIFTING EXPECTATIONS